Inventor(s): Martin Baechle et al.
Title: METHOD FOR BLEEDING AND REFILLING AN ELECTROHYDRAULIC BRAKE SYSTEM
Attorney Docket No.: PC10504US
Customer I.D.: 23122
Sheet 1 of 6
REPLACEMENT DRAWINGS

10/524389 #4

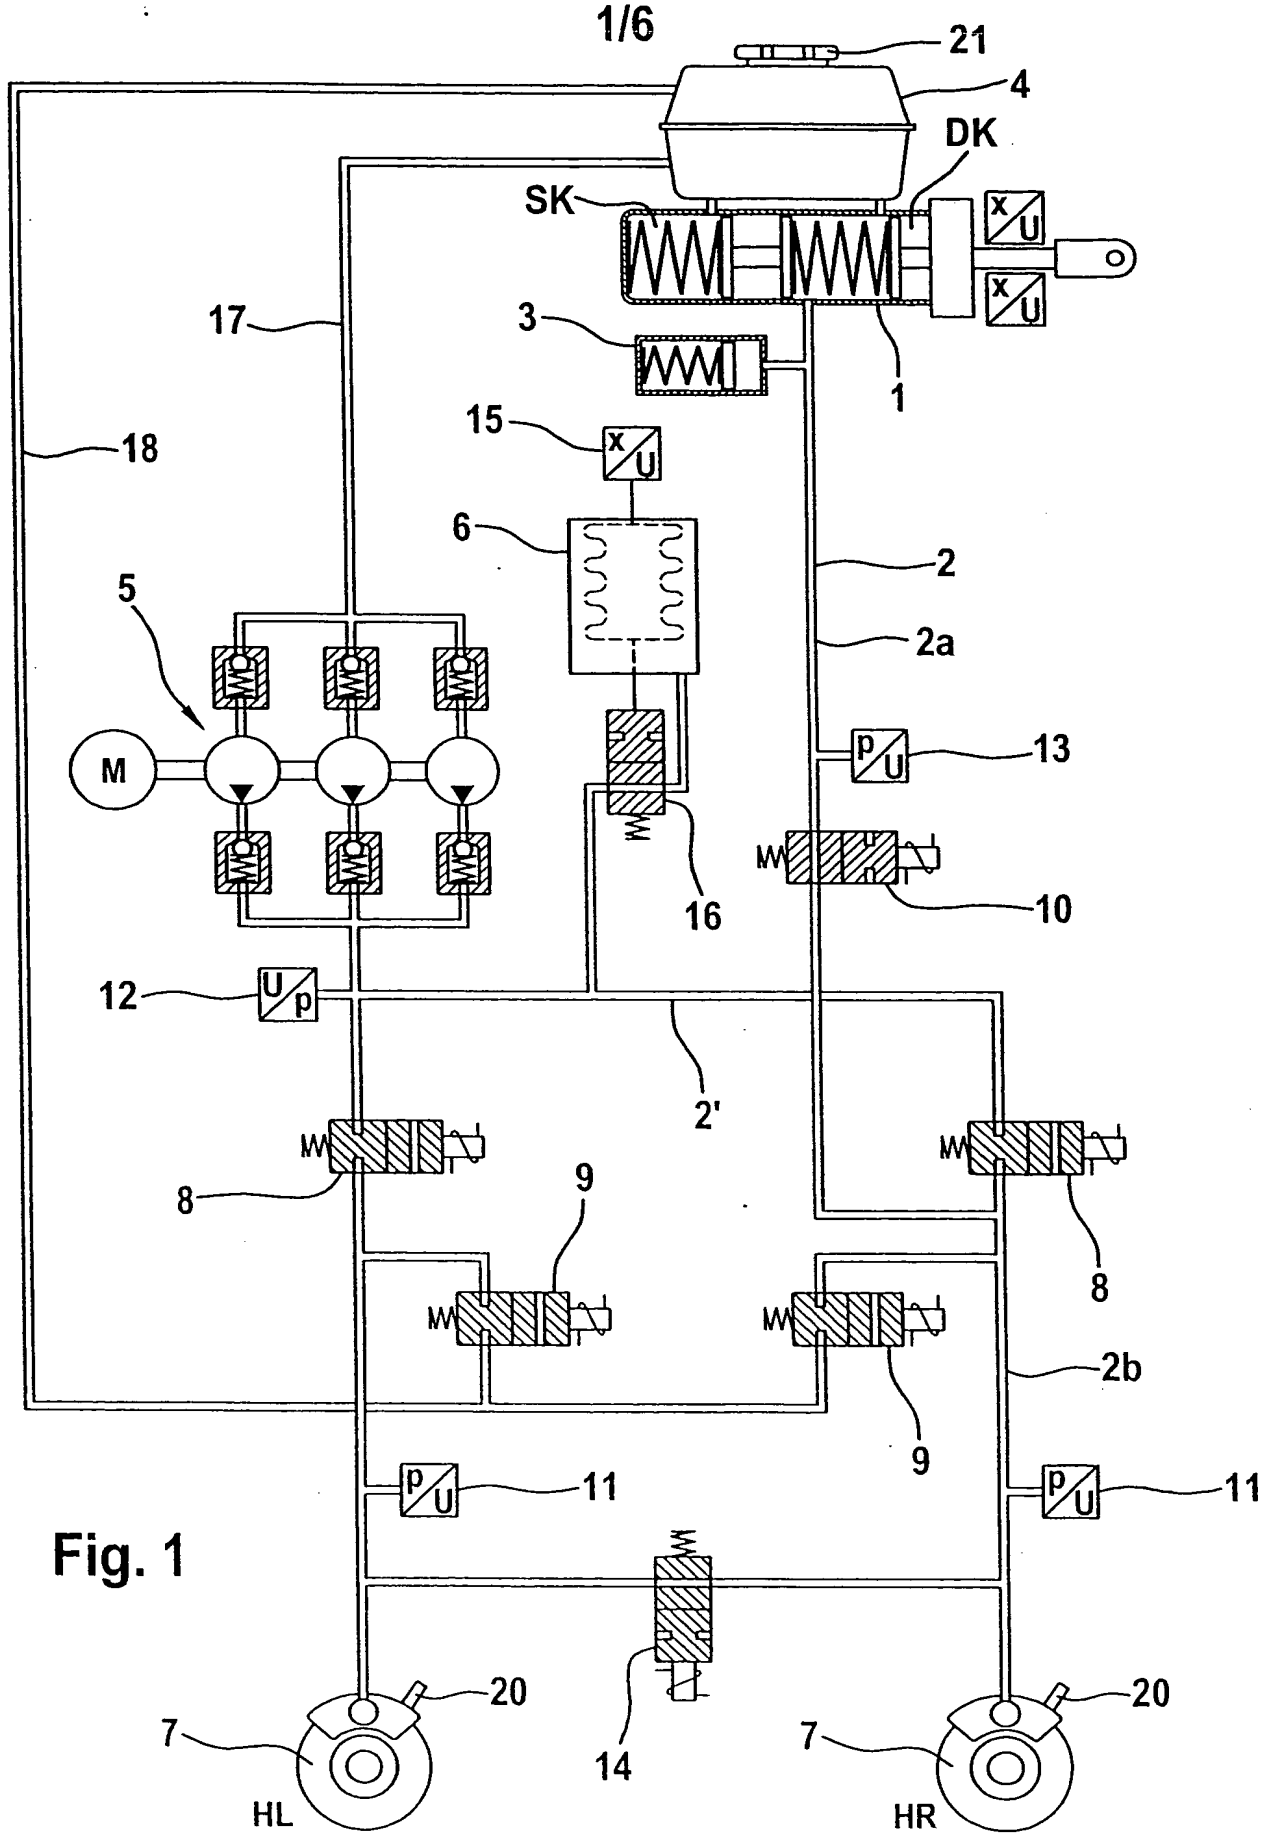

Fig. 1

Switching sequence 1

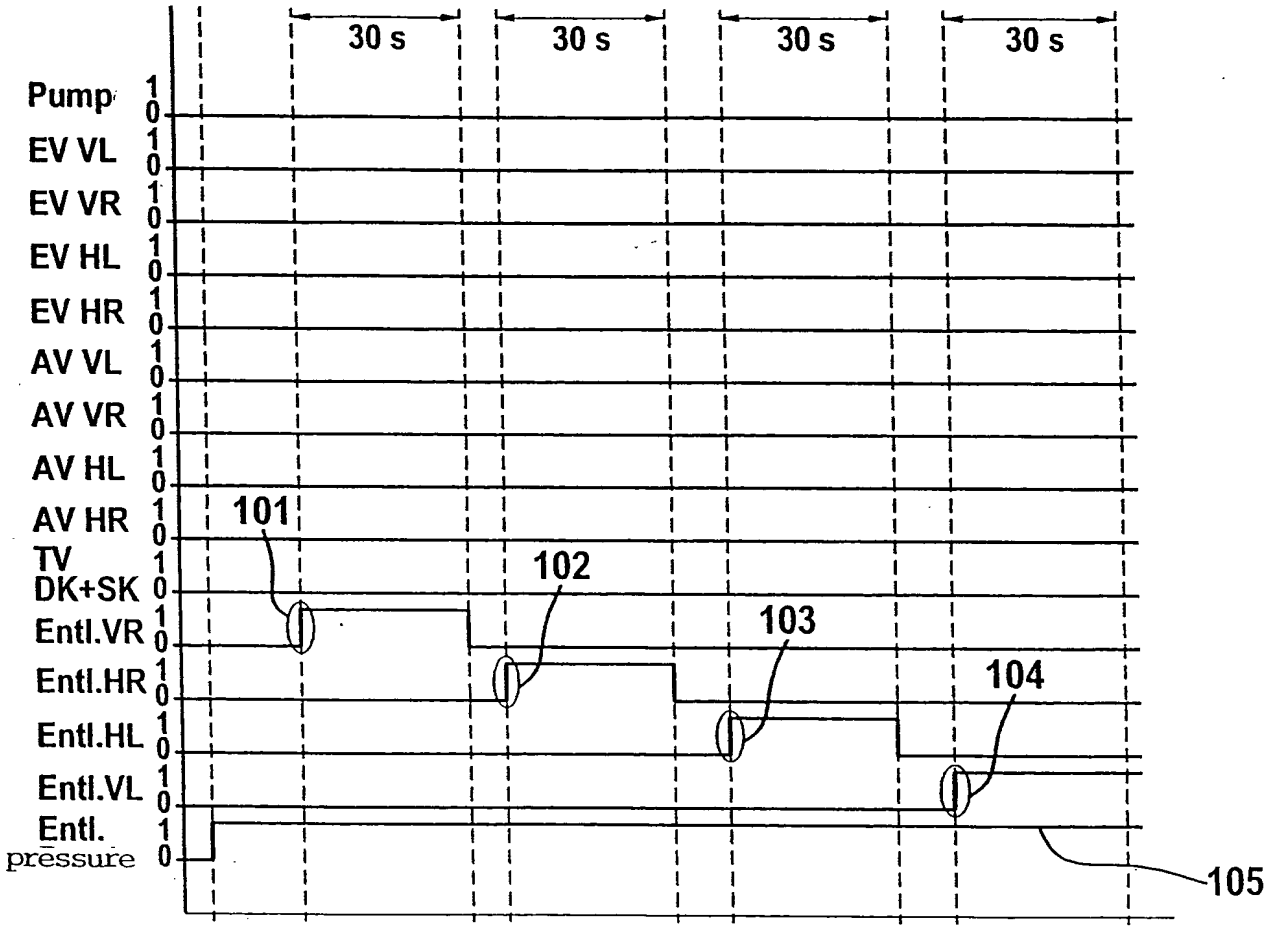

Entl. = bleeder connection
EV inlet valve
AV outlet valve
TV cut-off valve
DK push rod piston
SK floating piston
VL front left, VR front right
HL rear left, HR rear right

Fig. 2

#4

10/524389

switching sequence 2

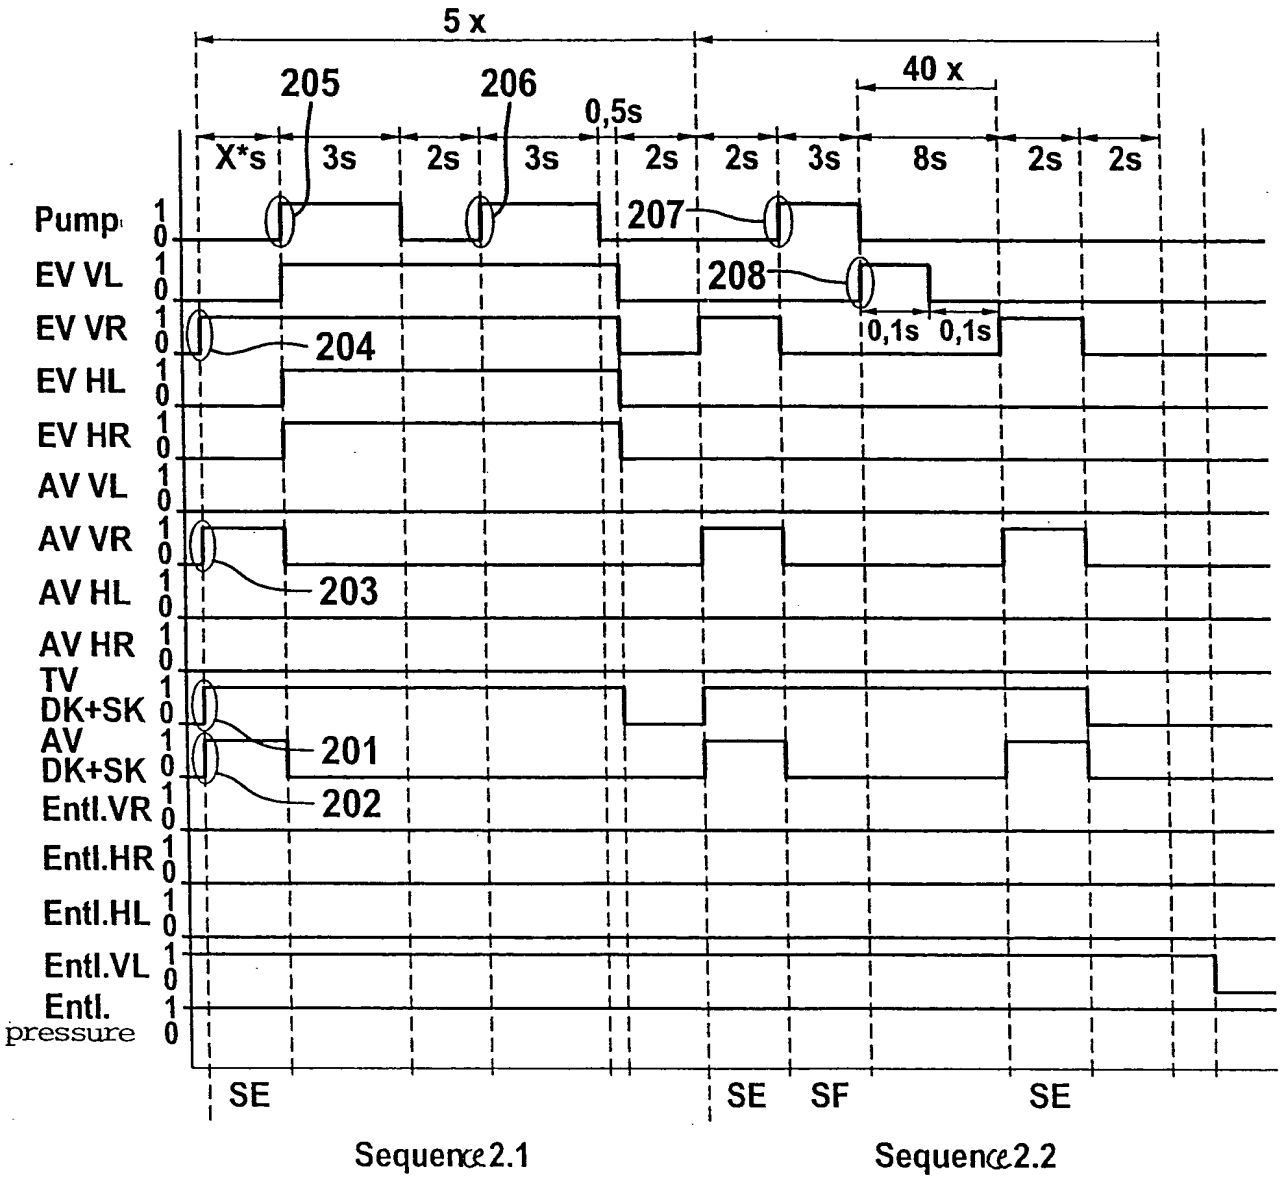

Entl. = bleeder connection
EV inlet valve
AV outlet valve
TV cut-off valve
DK push rod piston
SK floating piston
VL front left, VR front right
HL rear left, HR rear right

Fig. 3

switching sequence 3

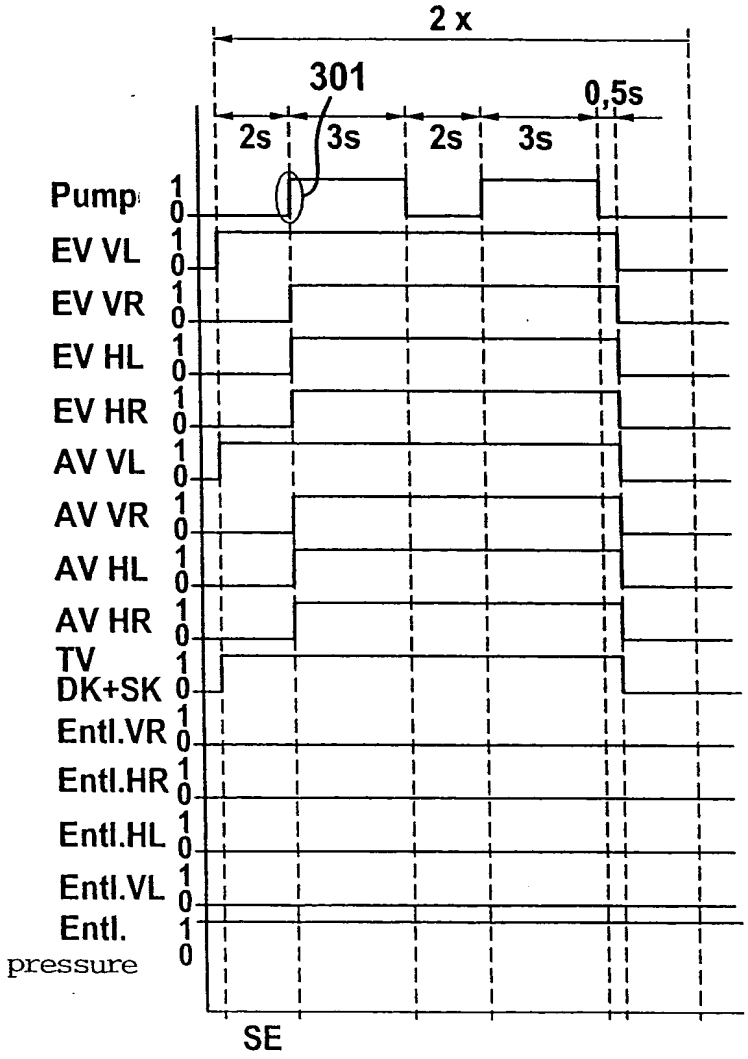

Entl. = bleeder connection
EV inlet valve
AV outlet valve
TV cut-off valve
DK push rod piston
SK floating piston
VL front left, VR front right
HL rear left, HR rear right

Fig. 4

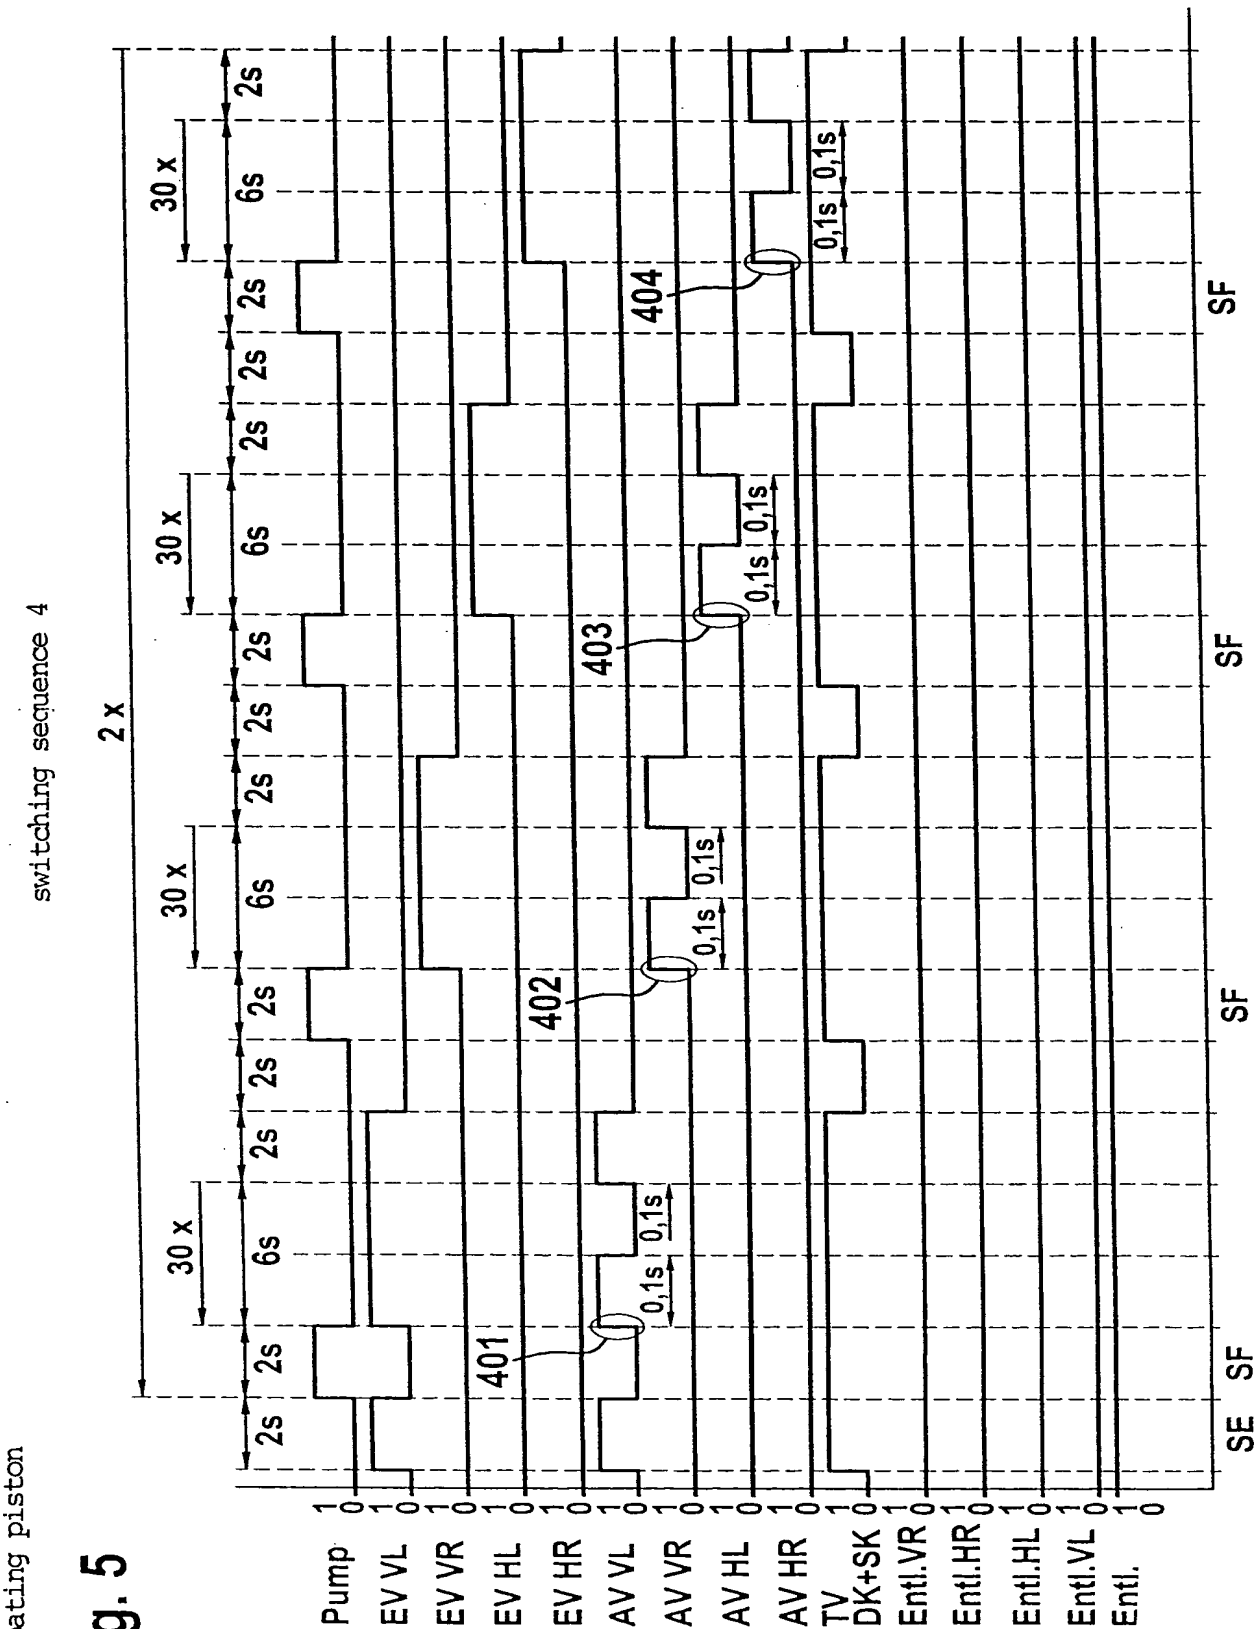

Fig. 5

Entl. = bleeder connection
EV inlet valve
AV outlet valve
TV cut-off valve
DK push rod piston
SK floating piston

VL front left, VR front right
HL rear left, HR rear right

switching sequence 5

up to 20 bar wheel pressure in each case

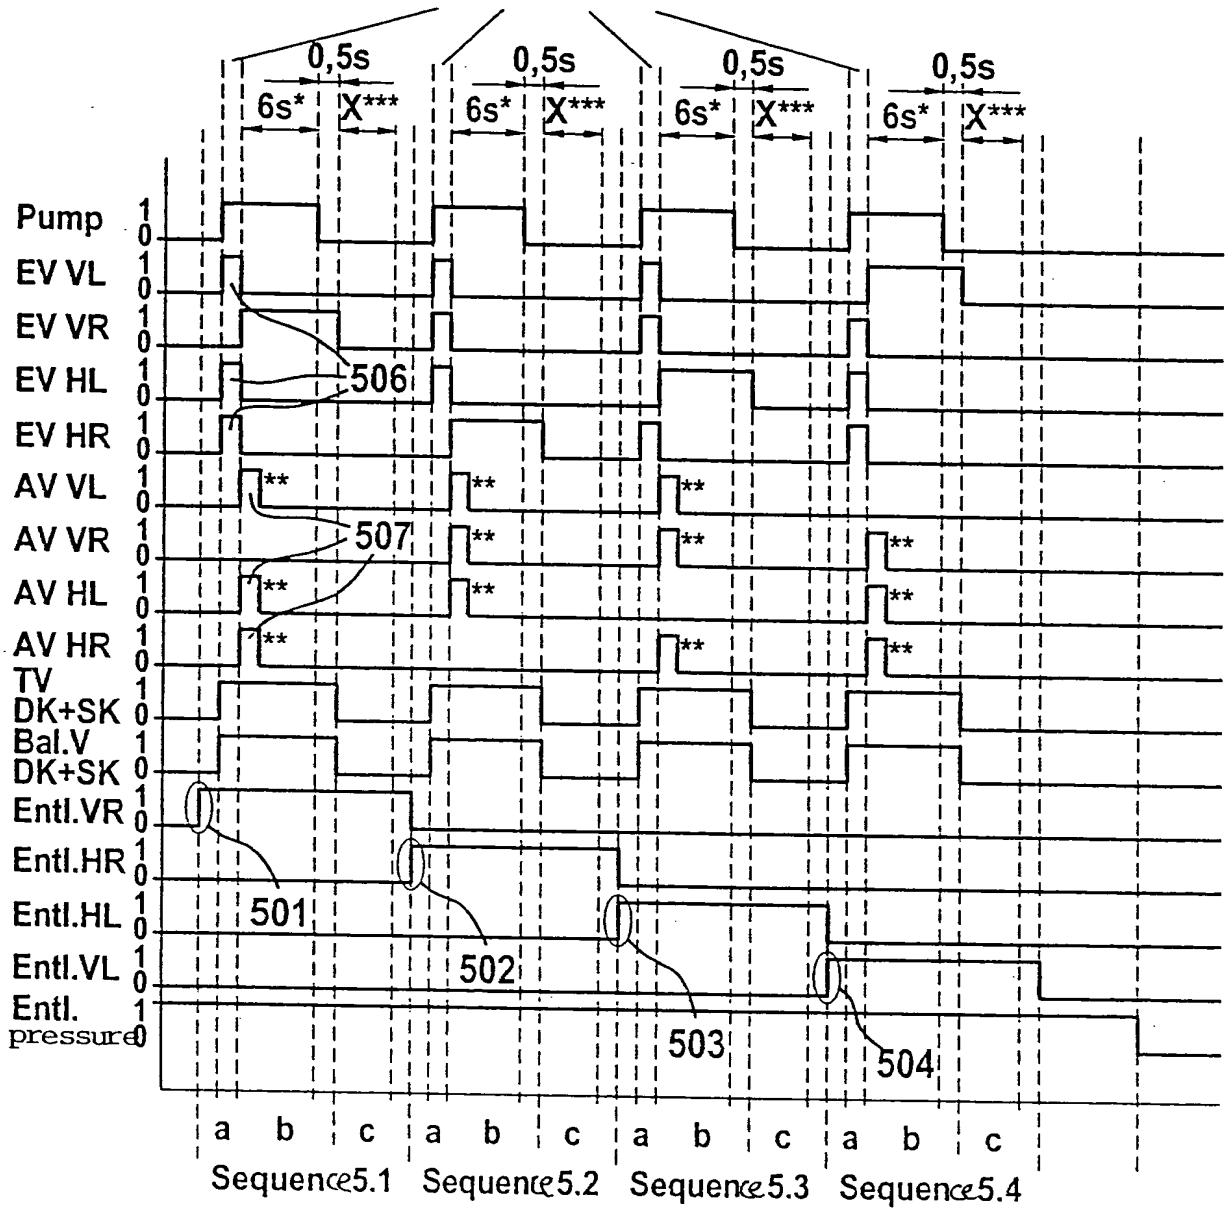

EV inlet valve
AV outlet valve
TV cut-off valve

~~ENTL~~
wheelbleeder connection
DK push rod piston
SK floating piston
VL front left, VR front right
HL rear left, HR rear right

Fig. 6